



TRUNCATED DOME PATTERN

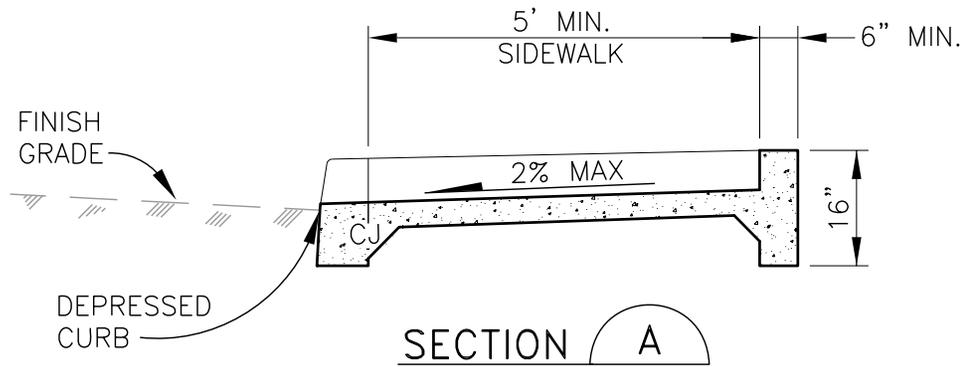

NOTES:

1. TRUNCATED DOME PATTERN SHALL BE 2' DEEP, WIDTH VARIES (4' MINIMUM).
2. REFERENCE TECHNICAL SPEC. SECTION 4150.
3. TRUNCATED DOME TO BE SAFETY YELLOW OR APPROVED OTHERWISE.
4. COMPLY WITH CURRENT ADA STANDARDS.
5. MATERIAL - 3500 PSI CONCRETE AT 28 DAYS.

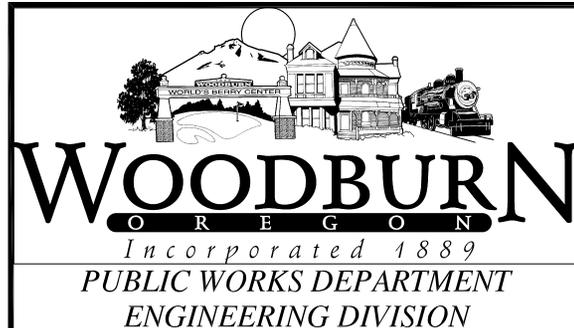

ADA RAMP AT CURBSIDE SIDEWALK

REV: DEC. 2007

SCALE: NTS

DET No.

4150-5